



CMA-66H

High Temperature
66" Conveyor
Dishwasher



FEATURES:

- 205 racks / 820 covers per hour.
- Economical to operate. Uses only .94 gallons of water per cycle.
- Four-stage washing process provides pre-wash, dual power wash and final rinse all in a 66" machine.
- Unique soil purging system filters wash water and traps plate debris into an external tray. Tray can be easily removed for dumping contents.
- All stainless steel construction offers durable performance and years of trouble free operation.
- Built-in chemical resistant industrial 10kW heater is proven to be more durable than commercial style heaters.
- Large 19" high opening accommodates larger items and utensils.
- Auto start/stop makes operation safe and easy.
- Includes table limit switch and rack saver arm that protect the machine, dishracks and table from damage.
- Two speed settings available for optimum cleaning performance.
- Auto Fill.
- Built-in Poly Pro™ scap accumulator. Patent pending.



Rack saver clutch system protects the machine, dishracks and table from damage.




Four-stage washing process provides pre-wash, power wash and final rinse all in a 66" machine.



Large 19" high opening accommodates larger items and utensils.



Shown with optional corner feed table. Available right or left.

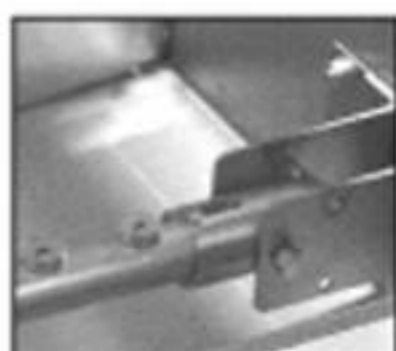

Easy to remove wash arms with captive end caps. **Never lose another end cap again!**




Top mounted controls include easy to read temperature gauges and complete operating instructions.



CMA-66H

High Temperature
66" Conveyor
Dishwasher

WARNING: Plumbing connections need to be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

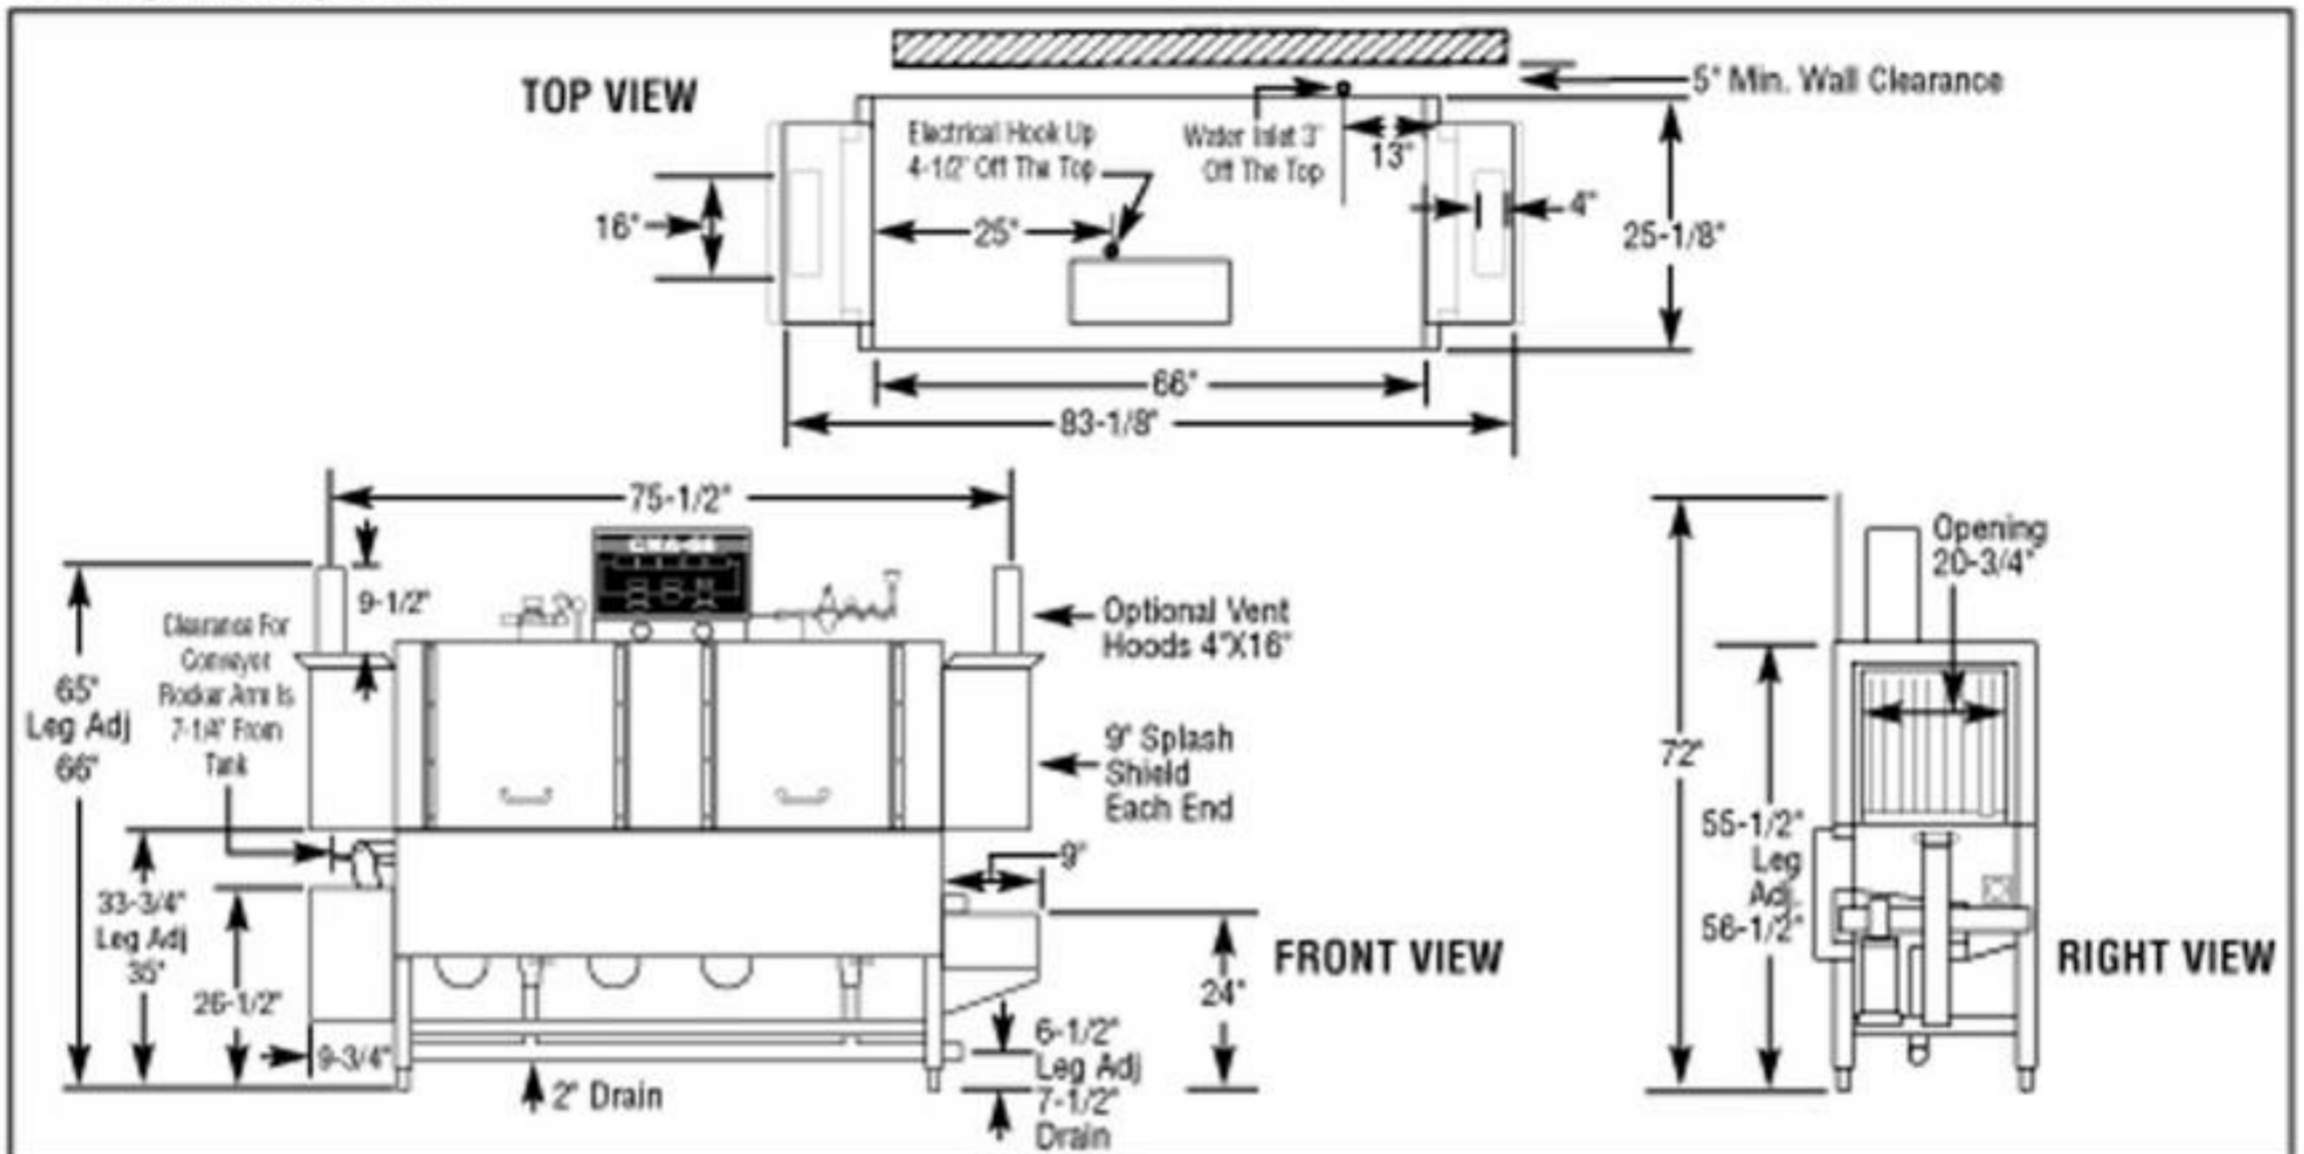

Specifications:

MODEL CMA-66H	USA	METRIC		USA	METRIC	
OPERATING CAPACITY			DIMENSIONS			
RACKS PER HOUR (NSF RATED)	205	205	DEPTH	25-1/8"	(64cm)	
CONVEYOR SPEED	5.7 FT./MIN.	(174 CM/MIN.)	WIDTH	66"	(167.64cm)	
DRAIN	2"	-	HEIGHT	69-1/2" (73" door open)	(176.5cm)	
(3) WASH PUMP MOTORS HP	1	1	STANDARD TABLE HEIGHT	34"	(86cm)	
CONVEYOR MOTOR HP	1/3	1/3	MAX HEIGHT CLEARANCE FOR DISHES	19"	(48cm)	
WATER INLET - FILL	3/4"	-	STANDARD DISHRACK			
WATER INLET - FINAL RINSE	1/2"	-	DIMENSIONS	19-3/4"X19-3/4"	(50X50cm)	
WASH TANK CAPACITY			ELECTRICAL RATING	VOLTS	PHASE	AMPS
PRE-WASH	5.25 GAL	(20.0 L)		208	1	63
WASH	13.25 GAL	(50.0 L)		240	1	63
TOTAL	18.5 GAL	(70 L)		208	3	42
				240	3	45
WASH PUMP CAPACITY			ELECTRIC TANK HEATER	10kW		
EACH	38 GPM	(143.8 LPM)	SPECIFY DIRECTION OF RACK TRAVEL (RIGHT TO LEFT OR LEFT TO RIGHT) WHEN ORDERING			
OPERATING TEMPERATURE			CMA-66H EXHAUST VENTILATION REQUIREMENTS AT 100% CAPACITY CFM			
WASH	150°F-160°F	(68°C-71°C)	ENTRANCE END 200 MAX	DISCHARGE END 400 MAX	TOTAL CFM 600 MAX	
FINAL RINSE	180°F-195°F	(82°C-90.5°C)				
WATER CONSUMPTION			SHIPPING WEIGHT			
PER RACK (FINAL RINSE)	.94 GAL	(3.6 L)	APPROXIMATE	750#		(340.2kg)
PER HOUR (FINAL RINSE)	192 GPH	(726.8 LPH)				

Summary Specifications: Model CMA-66H

The Model CMA-66H high temperature conveyor dishwasher meets NSF, UL, and CUL sanitation and construction standards utilizing 180°F final rinse water. The CMA-66H performs four separate washing functions including a built-in pre-wash, dual wash and final rinse all in a 66" space. The CMA-66H washes up to 205 racks per hour and uses a minimum .94 gallons of water per rack while achieving sparkling, clean, dry dishes. Constructed entirely of stainless steel.

Available Models

- CMA-66H R/L Right to Left
- CMA-66H L/R Left to Right

Available Options

- Corner Feed Table Standard or Sheet Pans
- Alternative electrical options
- Also available at 167 racks/hr
- Stainless steel dishtables
- Vent Hood with 4" X 16" Vent and Damper Control (2 per set)
- Motor Cover
- Hatco C-24 Booster Heater (40°F Rise)
- Hatco C-45 Booster Heater (70°F Rise)

